

M10 - POPULAR

EXCEEDS 72 HR SALT SPRAY.
8,000 PSI MAX PRESSURE.



DIN 71412

The larger, stronger 10.0 mm threads on these parts are suited for use on industrial machinery, construction equipment and on any rugged application where fitting damage is a concern. The full hex body form of the H2111Z3 is preferred in some applications but functions similarly to conventional round body forms.

TECHNICAL DRAWINGS ARE APPROXIMATE ACTUAL SIZE

Item #	Thread	Angle (E)	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Overall Width (D)	Thread Diameter (F)	Swing Clearance (G)	Hex (H)
H2109Z3	M10 x 1.0	Straight	16.0 mm	5.5 mm	3.7 mm	—	10.0 mm	—	11.0 mm
H2110Z3	M10 x 1.0	45°	21.0 mm	5.5 mm	3.7 mm	16.0 mm	10.0 mm	11.0 mm	11.0 mm
H2111Z3	M10 x 1.0	90°	18.0 mm	5.5 mm	3.7 mm	20.0 mm	10.0 mm	15.0 mm	11.0 mm
H211610Z3	M10 x 1.0	Straight	17.5 mm	7.5 mm	4.0 mm	—	10.0 mm	—	11.0 mm

PROTECTIVE DEVICES

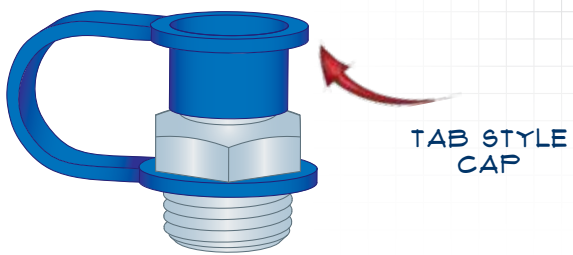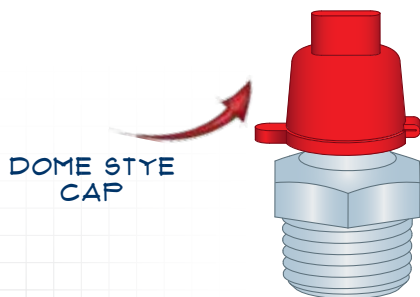

COLOR CODED GREASE CAPS, PAGE 100, HELP TO LABEL GREASING POINTS FOR SPECIFIC LUBRICANTS AND/OR GREASING SCHEDULES

Common Parts Parts with this designation are in wide distribution. **Alemite** Alemite® is a registered trademark of Alemite, LLC, Johnson City, TN, USA. **Lincoln Industrial** Lincoln Industrial® is a registered trademark of Lincoln Industrial (USA) Corp. **John Deere** John Deere® is a registered trademark of Deere and Company, Moline, Illinois.

All manufacturer names and numbers are for cross reference identification purposes only. In no way are we implying that our parts were made by the manufacturers listed. Prices, materials, dimensions, tolerances, designs and grades subject to change without notice. © G.L. Huyett 2019