

VENT


EXCEEDS 72 HR SALT SPRAY.

1/8" PTF

Vent fittings are designed to be positioned above the fluid level to prevent fluid loss and component failure. All vents have a cap which reduces external contaminants from entering the housing. The felt filter on the H300805 provides an additional level of protection from contamination.

H300805

Vent - Felt Filter
1/8"-27 PTF Spl. Short
Opening Range 0.04-0.11 psi

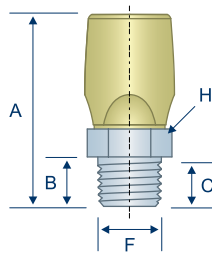


 300805
 AT142746

FELT FILTER

H330766

Vent
1/8"-27 PTF SAE Short
Opening Range 2.5-4 psi




 330766

Item #	Thread	Opening Pressure	Overall Length (A)	Shank Length (B)	Min. Thread Length (C)	Thread Diameter (F)	Hex (H)
H300805	1/8"-27	0.04-0.11 psi	1.00"	.27"	.19"	.39"	7/16"
H330766	1/8"-27	2.5-4 psi	1.00"	.26"	.19"	.39"	7/16"


DESIGN FEATURE

H300805

CLOSED



OPEN

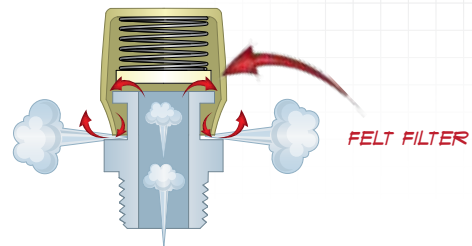

THE H300805 CONTAINS A FELT FILTER INSTEAD OF A RUBBER SEAL FOR ADDITIONAL PROTECTION FROM DEBRIS