

# THREE-POINT PINS

HUYETT.COM • 785-392-3017

BOX 232 • MINNEAPOLIS, KS • 67467  
SALES@HUYETT.COM • FAX 785-392-2845

## HITCH – ROUND HANDLE

### DESCRIPTION

Hitch pins are used to attach trailers and various turf and agricultural implements. Manufactured from heat treated steel with swivel handle.

### PREFIX MATERIAL/FINISH

HP = C1035-1045 STEEL, ZINC YELLOW  
HPZ = C1035-1045 STEEL, ZINC CLEAR  
HPLN = C1035-1045 STEEL, ZINC CLEAR WITH OPTIONAL TETHER


Bridge pin included with HP, HPZ, and HPLN.

Material/finish combinations may not be available in all sizes.

ADDITIONAL SIZES AND FINISHES MAY BE AVAILABLE UPON REQUEST

### HOW TO IDENTIFY

1. Verify pin with swivel handle and drilled hole at opposite end.
2. Measure diameter (A).
3. Measure effective length (C).
4. Find the part in the chart below.

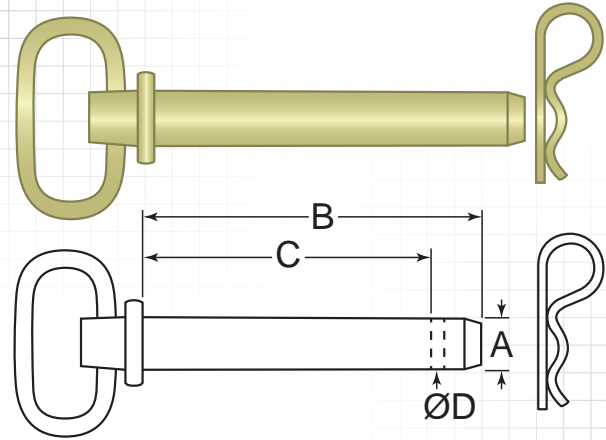

ITEM NUMBER	(C) EFFECTIVE LENGTH +.030/-0.000"	(B) SHANK LENGTH +.030/-0.000"
<b>3/8 (.375")</b> (A) Outside Diameter .375/.365"		
(D) Hole Diameter: .156" (5/32) .166/.151" Head Diameter: .690" .700/.680"		
PREFIX-0375-3000R	3.000" (3)	3.375" (3-3/8)
PREFIX-0375-4000R	4.000" (4)	4.375" (4-3/8)
PREFIX-0375-4250R	4.250" (4-1/4)	4.625" (4-5/8)
<b>1/2 (.500")</b> (A) Outside Diameter .500/.490"		
(D) Hole Diameter: .203" (13/64) .213/.198" Head Diameter: .910" .920/.900"		
PREFIX-0500-3500R	3.500" (3-1/2)	4.250" (4-1/4)
PREFIX-0500-4000R	4.000" (4)	4.750" (4-3/4)
PREFIX-0500-4250R	4.250" (4-1/4)	5.000" (5)
PREFIX-0500-5750R	5.750" (5-3/4)	6.500" (6-1/2)
<b>5/8 (.625")</b> (A) Outside Diameter .625/.615"		
(D) Hole Diameter: .203" (13/64) .213/.198" Head Diameter: 1.080" 1.090/1.070"		
PREFIX-0625-4000R	4.000" (4)	4.750" (4-3/4)
PREFIX-0625-4250R	4.250" (4-1/4)	5.000" (5)
PREFIX-0625-4500R	4.500" (4-1/2)	5.250" (5-1/4)
PREFIX-0625-5000R	5.000" (5)	5.750" (5-3/4)
PREFIX-0625-5750R	5.750" (5-3/4)	6.500" (6-1/2)
PREFIX-0625-6000R	6.000" (6)	6.750" (6-3/4)
PREFIX-0625-6250R	6.250" (6-1/4)	7.000" (7)
<b>3/4 (.750")</b> (A) Outside Diameter .750/.740"		
(D) Hole Diameter: .203" (13/64) .213/.198" Head Diameter: 1.270" 1.280/1.260"		
PREFIX-0750-4000R	4.000" (4)	4.750" (4-3/4)
PREFIX-0750-4250R	4.250" (4-1/4)	5.000" (5)
PREFIX-0750-4500R	4.500" (4-1/2)	5.250" (5-1/4)
PREFIX-0750-6000R	6.000" (6)	6.750" (6-3/4)

ITEM NUMBER	(C) EFFECTIVE LENGTH +.030/-0.000"	(B) SHANK LENGTH +.030/-0.000"
PREFIX-0750-6250R	6.250" (6-1/4)	7.000" (7)
<b>7/8 (.875")</b> (A) Outside Diameter .875/.865"		
(D) Hole Diameter: .203" (13/64) .213/.198" Head Diameter: 1.450" 1.460/1.440"		
PREFIX-0875-4250R	4.250" (4-1/4)	5.250" (5-1/4)
PREFIX-0875-4500R	4.500" (4-1/2)	5.500" (5-1/2)
PREFIX-0875-6000R	6.000" (6)	7.000" (7)
PREFIX-0875-6250R	6.250" (6-1/4)	7.250" (7-1/4)
PREFIX-0875-7000R	7.000" (7)	8.000" (8)
<b>1 (1.000")</b> (A) Outside Diameter 1.000/.990"		
(D) Hole Diameter: .203" (13/64) .213/.198" Head Diameter: 1.640" 1.650/1.630"		
PREFIX-1000-4250R	4.250" (4-1/4)	5.250" (5-1/4)
PREFIX-1000-4500R	4.500" (4-1/2)	5.500" (5-1/2)
PREFIX-1000-6000R	6.000" (6)	7.000" (7)
PREFIX-1000-6250R	6.250" (6-1/4)	7.250" (7-1/4)
PREFIX-1000-7000R	7.000" (7)	8.000" (8)
<b>1-1/8 (1.125")</b> (A) Outside Diameter 1.125/1.115"		
(D) Hole Diameter: .250" (1/4) .260/.245" Head Diameter: 1.810" 1.820/1.800"		
PREFIX-1125-7000R	7.000" (7)	7.750" (7-3/4)
<b>1-1/4 (1.250")</b> (A) Outside Diameter 1.250/1.240"		
(D) Hole Diameter: .250" (1/4) .260/.245" Head Diameter: 1.856" 1.866/1.846"		
PREFIX-1250-7000R	7.000" (7)	7.750" (7-3/4)
<b>1-1/2 (1.500")</b> (A) Outside Diameter 1.500/1.490"		
(D) Hole Diameter: .250" (1/4) .260/.245" Head Diameter: 2.500" (2-1/2) 2.510/2.490"		
PREFIX-1500-8000R	8.000" (8)	9.000" (9)

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.

Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett