



THREE-POINT PINS

HUYETT.COM • 785-392-3017

LYNCH – IMPERIAL

DESCRIPTION

A solid pin with an attached self-locking ring that snaps down firmly to hold the part securely in place. Also available with attached chain and cotter pin.

HOW TO IDENTIFY


1. Verify pin with attached self-locking ring.
2. Measure pin diameter (A).
3. Measure effective length (E).
4. Find the part in the chart below.

PREFIX MATERIAL/FINISH

LP = CARBON STEEL, ZINC YELLOW
 LP-##-H = HEAVY DUTY VERSION
 LPC = CARBON STEEL, ZINC YELLOW, OPTIONAL CHAIN AND COTTER INCLUDED

Material/finish combinations may not be available in all sizes.

ADDITIONAL SIZES AND FINISHES MAY BE AVAILABLE UPON REQUEST

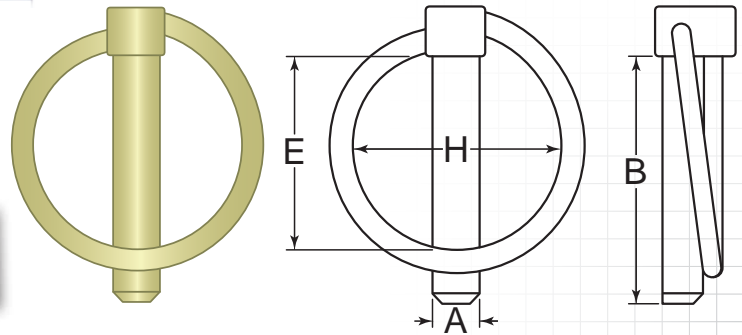

ITEM NUMBER	(A) OUTSIDE DIAMETER	(E) EFFECTIVE LENGTH +.079/- .039"	(B) SHANK LENGTH +.040/- .040"	(H) INSIDE DIAMETER
	-.002/- .007"			
PREFIX-187-0875	.188" (3/16)	.875" (7/8)	1.125" (1-1/8)	1.000" (1)
PREFIX-187-1000	.188" (3/16)	1.000" (1)	1.250" (1-1/4)	1.125" (1-1/8)
PREFIX-187-1250	.188" (3/16)	1.250" (1-1/4)	1.563" (1-9/16)	1.406" (1-13/32)
PREFIX-187-1312	.188" (3/16)	1.313" (1-5/16)	1.563" (1-9/16)	1.438" (1-7/16)
PREFIX-250-1250	.250" (1/4)	1.250" (1-1/4)	1.563" (1-9/16)	1.406" (1-13/32)
PREFIX-250-1250A	.250" (1/4)	1.250" (1-1/4)	1.750" (1-3/4)	1.406" (1-13/32)
PREFIX-250-1312	.250" (1/4)	1.313" (1-5/16)	1.750" (1-3/4)	1.438" (1-7/16)
PREFIX-250-1375	.250" (1/4)	1.375" (1-3/8)	1.750" (1-3/4)	1.500" (1-1/2)
PREFIX-250-1500	.250" (1/4)	1.500" (1-1/2)	1.750" (1-3/4)	1.563" (1-9/16)
PREFIX-250-1625	.250" (1/4)	1.625" (1-5/8)	1.750" (1-3/4)	1.688" (1-11/16)
PREFIX-250-1750	.250" (1/4)	1.750" (1-3/4)	2.000" (2)	1.875" (1-7/8)
PREFIX-312-1250	.313" (5/16)	1.250" (1-1/4)	1.563" (1-9/16)	1.406" (1-13/32)
PREFIX-312-1250A	.313" (5/16)	1.250" (1-1/4)	1.750" (1-3/4)	1.406" (1-13/32)
PREFIX-312-1375	.313" (5/16)	1.375" (1-3/8)	1.750" (1-3/4)	1.500" (1-1/2)
PREFIX-312-1500	.313" (5/16)	1.500" (1-1/2)	1.750" (1-3/4)	1.563" (1-9/16)
PREFIX-312-1625	.313" (5/16)	1.625" (1-5/8)	2.344" (2-11/32)	1.875" (1-7/8)
PREFIX-312-1625A	.313" (5/16)	1.625" (1-5/8)	2.375" (2-3/8)	1.875" (1-7/8)
PREFIX-312-1750	.313" (5/16)	1.750" (1-3/4)	2.000" (2)	1.875" (1-7/8)
PREFIX-312-2062	.313" (5/16)	2.063" (2-1/16)	2.344" (2-11/32)	2.188" (2-3/16)
	-.002/- .020"			
PREFIX-437-1250	.438" (7/16)	1.250" (1-1/4)	1.750" (1-3/4)	1.406" (1-13/32)
PREFIX-437-1343	.438" (7/16)	1.344" (1-11/32)	1.563" (1-9/16)	1.531" (1-17/32)
PREFIX-437-1343A	.438" (7/16)	1.344" (1-11/32)	1.969" (1-31/32)	1.531" (1-17/32)
PREFIX-437-1375	.438" (7/16)	1.375" (1-3/8)	1.750" (1-3/4)	1.500" (1-1/2)
PREFIX-437-1437	.438" (7/16)	1.438" (1-7/16)	2.000" (2)	1.531" (1-17/32)
PREFIX-437-1500	.438" (7/16)	1.500" (1-1/2)	2.000" (2)	1.563" (1-9/16)
PREFIX-437-1500A	.438" (7/16)	1.500" (1-1/2)	1.750" (1-3/4)	1.563" (1-9/16)
PREFIX-437-1500B	.438" (7/16)	1.500" (1-1/2)	1.969" (1-31/32)	1.563" (1-9/16)
PREFIX-437-1625	.438" (7/16)	1.625" (1-5/8)	1.938" (1-15/16)	1.875" (1-7/8)
PREFIX-437-1750	.438" (7/16)	1.750" (1-3/4)	2.250" (2-1/4)	2.000" (2)
PREFIX-437-2250	.438" (7/16)	2.250" (2-1/4)	2.500" (2-1/2)	2.625" (2-5/8)

FOR DETAILED SPECIFICATIONS AND TOLERANCES, VISIT HUYETT.COM.
 Prices, materials, dimensions, tolerances, designs, and grades subject to change without notice. © 2015 G.L. Huyett